

## Documentation Power supply

### Single-phase AC/DC power supply 24 VDC

Art.no: **52 481 04**

Non stabilized, smoothed AC/DC power supply for 24VDC

Primary voltage: 0-220-230-240 VAC

Frequency: 50-60 Hz

Secondary voltage: No load 27 VDC  
80% load 24 VDC

Secondary current: 15 A

Ripple level: <7% (3,3VPP)

ta: 40°C (maximum ambient temperature)

Losses: Po 18,5 W , PI 69 W

Used components are UL-approved


**Standards: EN 61558-2-6, EN 50081-2, EN 50082-2**

Manufactured by TRAMO-ETV AB , SE-241 92 ESLÖV

Type:

**LOTK-15**

Connecting diagram

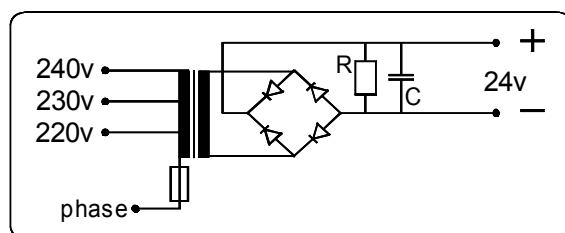

A: 235 mm  
B: 125 mm  
C: 185 mm  
D: 190 mm  
E: 175 mm  
F: 100 mm

Weight: 9,1 kg

