

Documentation Power supply

Single-phase AC/DC power supply 12 VDC

Art.no: **1200-4049**

Type:

LOT-112

Non-stabilized, unsmoothed AC/DC power supply for 12VDC

Primary voltage: 0-220-230 VAC

Frequency: 50-60 Hz

Secondary voltage: 80% load 12 VDC

Secondary current: 1 A


ta: 40°C (maximum ambient temperature)

Losses: Po 1,5 W , PI 4 W

Used components are UL-approved

Standards: EN 61558-2-6, EN 50081-2, EN 50082-2

Connecting diagram

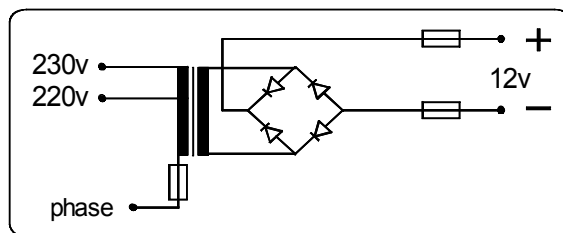

Manufactured by TRAMO-ETV AB , SE-241 92 ESLÖV

- A: 58 mm
- B: 65 mm
- C: 95 mm
- E: 35 mm
- F: 40 mm

Weight: 0,6 kg

