

Documentation Power supply

Single-phase AC/DC power supply 12 VDC

Art.no: **LOT-6012**

Type:
LOT-6012

Non-stabilized, unsmoothed AC/DC power supply for 12VDC

Primary voltage: 0-220-230 VAC

Frequency: 50-60 Hz

Secondary voltage: 80% load 12 VDC

Secondary current: 60 A


ta: 40°C (maximum ambient temperature)

Losses: Po 24 W , PI 140 W

Used components are UL-approved

Standards: EN 61558-2-6, EN 50081-2, EN 50082-2

Connecting diagram

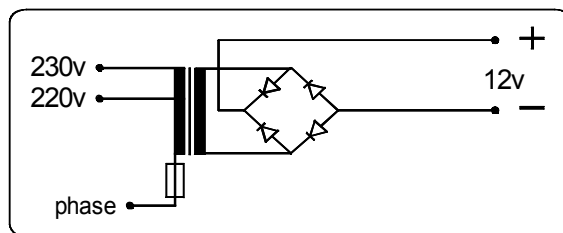

Manufactured by TRAMO-ETV AB , SE-241 92 ESLÖV

