

Documentation Power supply

Single-phase AC/DC power supply 24 VDC

Art.no: **1200-3734**

Non-stabilized, unsmoothed AC/DC power supply for 24VDC

Primary voltage: 0-220-230 VAC

Frequency: 50-60 Hz

Secondary voltage: No load <27,5 VDC
80% load 24 VDC

Secondary current: 0,8 A

ta: 40°C (maximum ambient temperature)


Losses: Po 2,2 W , PI 5 W

Used components are UL-approved

Standards: EN 61558-2-6, EN 50081-2, EN 50082-2

Type:
LOT-0,8

Connecting diagram

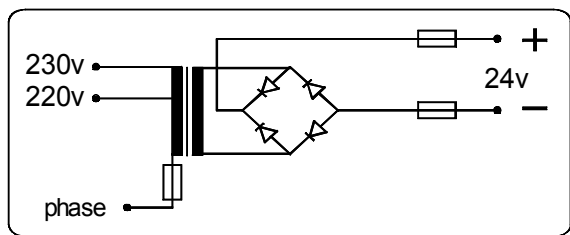

Manufactured by TRAMO-ETV AB , SE-241 92 ESLÖV

A: 50 mm
B: 60 mm
C: 95 mm
E: 35 mm
F: 48 mm

Weight: 0,8 kg