

# Documentation Power supply

## Single-phase AC/DC power supply 24 VDC

Art.no: **1200-3738**

Non-stabilized, unsmoothed AC/DC power supply for 24VDC

Primary voltage: 0-220-230 VAC

Frequency: 50-60 Hz

Secondary voltage: No load <26,5 VDC  
80% load 24 VDC

Secondary current: 5 A

ta: 40°C (maximum ambient temperature)

Losses: Po 6,5 W , PI 21 W

Used components are UL-approved


**Standards: EN 61558-2-6, EN 50081-2, EN 50082-2**

Manufactured by TRAMO-ETV AB , SE-241 92 ESLÖV

Type:

**LOT-5**

Connecting diagram

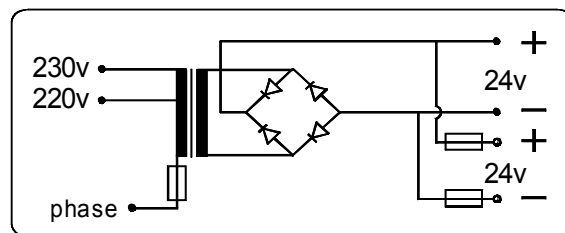

- A: 123 mm
- B: 80 mm
- C: 135 mm
- D: 115 mm
- E: 64 mm

Weight: 2,9 kg

