

Documentation Power supply

Single-phase AC/DC power supply 48 VDC

Art.no: **1275-06238**

Non stabilized, smoothed AC/DC power supply for 48VDC

Primary voltage: 0-220-230-240 VAC

Frequency: 50-60 Hz

Secondary voltage: No load 55 VDC
80% load 48 VDC

Secondary current: 2,5 A

Ripple level: <5% (4,8VPP)

ta: 40°C (maximum ambient temperature)

Losses: Po 13 W , PI 21 W

Used components are UL-approved


Standards: EN 61558-2-6, EN 50081-2, EN 50082-2

Manufactured by TRAMO-ETV AB , SE-241 92 ESLÖV

Type:

LOTK-2,5A48V

Connecting diagram

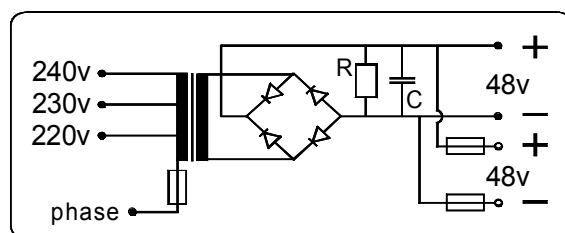

- A: 157 mm
- B: 80 mm
- C: 140 mm
- D: 123 mm
- E: 113 mm
- F: 63 mm

Weight: 3,2 kg

