

Documentation Power supply

Three-phase AC/DC power supply 24 VDC

Art.no: **1275-2797**

Non stabilized, unsmoothed AC/DC power supply for 24VDC

Primary voltage: 3x380-400 VAC

Frequency: 50-60 Hz

Secondary voltage: No load 27 VDC
80% load 24 VDC

Secondary current: 2,5 A

Ripple level: 8,5% (4VPP)

ta: 40°C (maximum ambient temperature)

Losses: Po 3,5 W , PI 12 W

Used components are UL-approved


Standards: EN 61558-2-6, EN 50081-2, EN 50082-2

Manufactured by TRAMO-ETV AB , SE-241 92 ESLÖV

Type:

TLOT-2,5

Connecting diagram

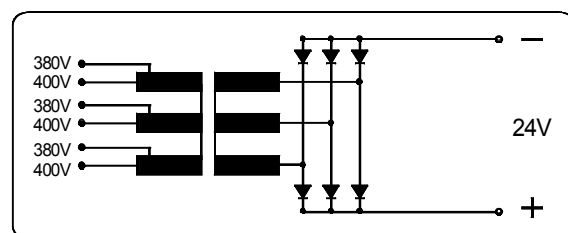

- A: 130 mm
- B: 120 mm
- C: 115 mm
- D: 119 mm
- E: 80 mm
- F: 100 mm

Weight: 2,2 kg

