

Documentation Power supply

**Three-phase AC/DC power supply
24 VDC**

Art.no: **52 481 10**

Non stabilized, smoothed AC/DC power supply for 24VDC

Primary voltage: 3x380-400 VAC

Frequency: 50-60 Hz

Secondary voltage: No load 27,5 VDC
80% load 24 VDC

Secondary current: 2,5 A

Ripple level: 0,9% (0,4VPP)

ta: 40°C (maximum ambient temperature)

Losses: Po 7 W , PI 13 W


Used components are UL-approved

Standards: EN 61558-2-6, EN 50081-2, EN 50082-2

Type:

TLOTK-2,5

Connecting diagram

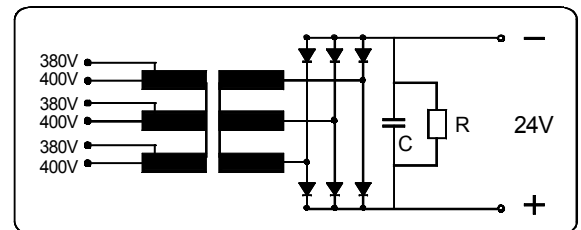

Manufactured by TRAMO-ETV AB , SE-241 92 ESLÖV

- A: 130 mm
- B: 120 mm
- C: 135 mm
- D: 119 mm
- E: 80 mm
- F: 100 mm

Weight: 2,4 kg

