

## Documentation Power supply

### Three-phase AC/DC power supply 24 VDC

Art.no: **52 481 11**

Non stabilized, smoothed AC/DC power supply for 24VDC

Primary voltage: 3x380-400 VAC

Frequency: 50-60 Hz

Secondary voltage: No load 27,5 VDC  
80% load 24 VDC

Secondary current: 5 A

Ripple level: 0,7% (0,37VPP)

ta: 40°C (maximum ambient temperature)

Losses: Po 10 W , PI 20 W

Used components are UL-approved


**Standards: EN 61558-2-6, EN 50081-2, EN 50082-2**

Manufactured by TRAMO-ETV AB , SE-241 92 ESLÖV

Type:

# TLOTK-5

Connecting diagram

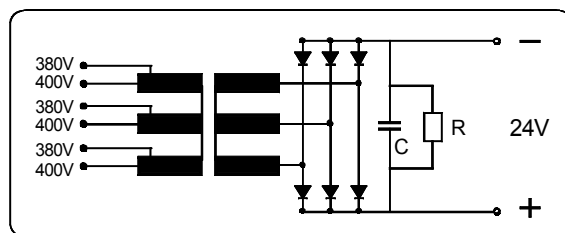

- A: 160 mm
- B: 150 mm
- C: 170 mm
- D: 150 mm
- E: 100 mm
- F: 125 mm

Weight: 4,2 kg

