

Documentation Power supply

**Three-phase AC/DC power supply
24 VDC**

Art.no: **52 481 12**

Non stabilized, smoothed AC/DC power supply for 24VDC

Primary voltage: 3x380-400 VAC

Frequency: 50-60 Hz

Secondary voltage: No load 27,5 VDC
80% load 24 VDC

Secondary current: 7 A

Ripple level: 0,8% (0,37VPP)

ta: 40°C (maximum ambient temperature)


Losses: Po 10 W , PI 28 W

Used components are UL-approved

Standards: EN 61558-2-6, EN 50081-2, EN 50082-2

Type:
TLOTK-7

Connecting diagram

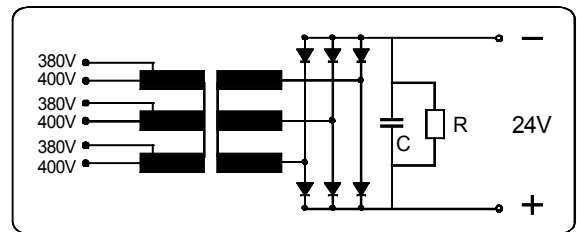

Manufactured by TRAMO-ETV AB , SE-241 92 ESLÖV

- A: 160 mm
- B: 150 mm
- C: 170 mm
- D: 150 mm
- E: 100 mm
- F: 125 mm

Weight: 4,3 kg

