

Documentation Power supply

Three-phase AC/DC power supply 24 VDC

Art.no: **52 481 14**

Non stabilized, smoothed AC/DC power supply for 24VDC

Primary voltage: 3x380-400 VAC

Frequency: 50-60 Hz

Secondary voltage: No load 27,5 VDC
80% load 24 VDC

Secondary current: 15 A

Ripple level: 1,3% (0,6VPP)

ta: 40°C (maximum ambient temperature)

Losses: Po 15 W , PI 58 W


Used components are UL-approved

Standards: EN 61558-2-6, EN 50081-2, EN 50082-2

Type:

TLOTK-15

Connecting diagram

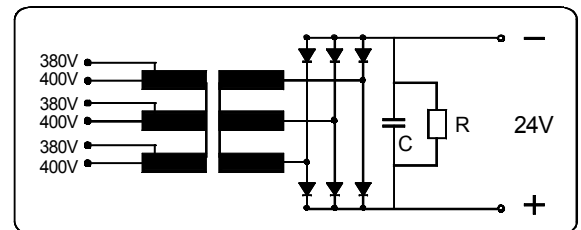

Manufactured by TRAMO-ETV AB , SE-241 92 ESLÖV

A: 187 mm
B: 177 mm
C: 195 mm
D: 176 mm
E: 120 mm
F: 150 mm

Weight: 7,7 kg

