

Documentation Power supply

**Three-phase AC/DC power supply  
24 VDC**

Art.no: **52 481 15**

Non stabilized, smoothed AC/DC power supply for 24VDC

Primary voltage: 3x380-400 VAC

Frequency: 50-60 Hz

Secondary voltage: No load 27 VDC  
80% load 24 VDC

Secondary current: 20 A

Ripple level: 0,9% (0,4VPP)

ta: 40°C (maximum ambient temperature)

Losses: Po 21 W , PI 64 W


Used components are UL-approved

**Standards: EN 61558-2-6, EN 50081-2, EN 50082-2**

Type:

**TLOTK-20**

Connecting diagram

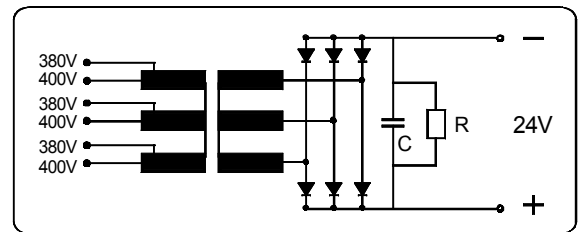

Manufactured by TRAMO-ETV AB , SE-241 92 ESLÖV

- A: 215 mm
- B: 208 mm
- C: 235 mm
- D: 203 mm
- E: 140 mm
- F: 175 mm

Weight: 12,1 kg

