



TRAMO

1-phase full transformer for universal mounting and installation in control cabinets unshielded design – IP00

Available with 1 or 2 fuses.
All components are UL-approved.

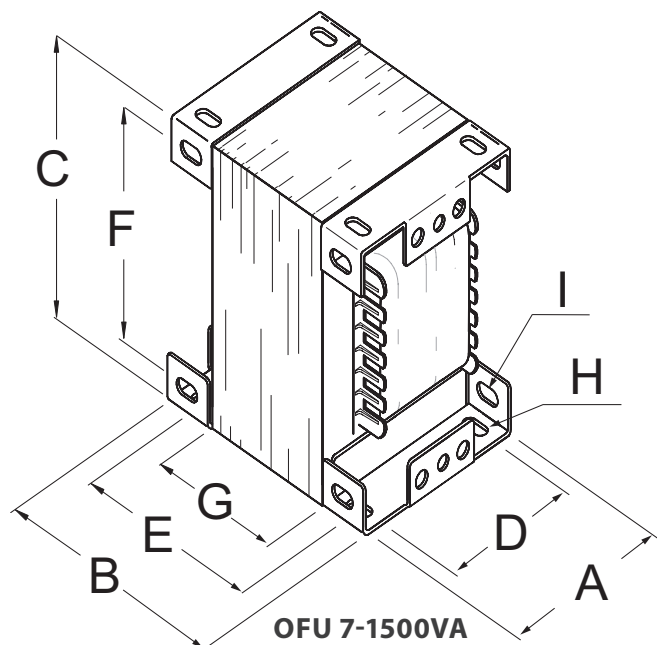

Standards	EN61558-2-1 EN61558-2-4 EN61558-2-6 IEC726 CE
Primary voltage	Customer-specific
Secondary voltage	Customer-specific
Rated secondary voltage is calculated for 80% load.	
Normal frequency	50-60 Hz
Maximum ambient temperature	40°C
Temperature class (temperature rise)	B (130°C)
Connection	Terminal block alt. cable lugs or free outlet cables

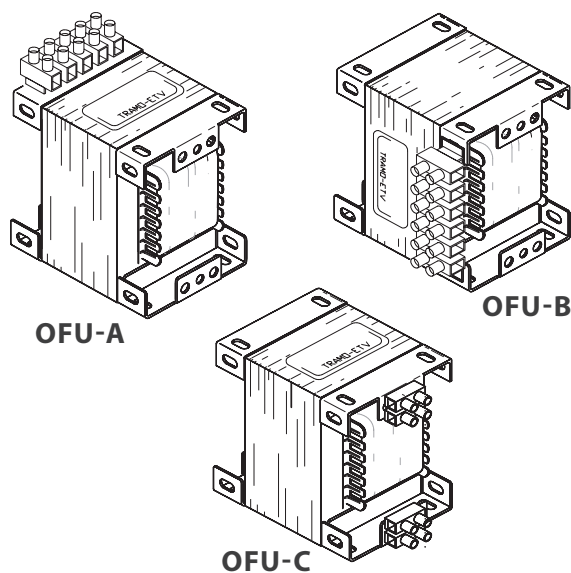

Power VA	Name Typ	Po W	Pcu W	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight kg
7	OFU-7	0,7	1,8	40	41	49	20	29	40	17	3,5x7	4,5x8	0,3
10	OFU-10	1,1	1,1	50	50	61	30	35	50	21	3,5x7	4,5x8	0,5
15	OFU-15	1,1	2,3	50	50	61	30	35	50	21	3,5x7	4,5x8	0,55
25	OFU-25	1,8	3,1	50	60	61	30	45	50	31	3,5x7	4,5x8	0,8
50	OFU-50	2,5	5,4	65	65	79	40	45	65	28	4,5x9	5,5x10	1,25
75	OFU-75	3,5	9	70	70	85	40	50	70	30	5,5x11	5,5x12	1,5
100	OFU-100	5	9,5	70	83	85	40	63	70	43	5,5x11	5,5x12	1,9
125	OFU-125	5	12	80	78	97	55	56	81	36	5,5x11	5,5x12	2,2
150	OFU-150	7	13	80	88	97	55	66	81	46	5,5x11	5,5x12	2,7
200	OFU-200	7	16	100	80	121	67	55	98	31	7x14	8x14	3,3
250	OFU-250	9	17	100	92	121	67	66	98	42	7x14	8x14	4,2
300	OFU-300	11	18	100	104	121	67	78	98	54	7x14	8x14	5,1
360	OFU-360	14	20	100	112	121	67	86	98	62	7x14	8x14	5,9
450	OFU-450	15	22	100	124	121	67	98	98	74	7x14	8x14	6,8
500	OFU-500	15	24	125	108	151	88	78	120	50	7x14	10x14	7,8
700	OFU-700	20	29	125	125	151	88	94	120	67	7x14	10x14	9,9
850	OFU-850	22	31	125	151	151	88	120	120	93	7x14	10x14	13
1000	OFU-1000	24	33	150	130	182	110	96	146	62	7x14	10x18	14,3
1200	OFU-1200	29	35	150	145	182	110	111	146	77	7x14	10x18	17,2
1400	OFU-1400	34	36	150	160	182	110	126	146	92	7x14	10x18	20,4
1500	OFU-1500	35	38	150	160	182	110	126	146	92	7x14	10x18	20,4

Terminal block mounting increases the build dimension by at least 22 mm, depending on the current rating.

N.B. Dimensions and weights are preliminary and will be confirmed upon order