


3-phase full transformer for floor mounting
Shielded design - IP-23

Alla ingående komponenter är UL-godkända

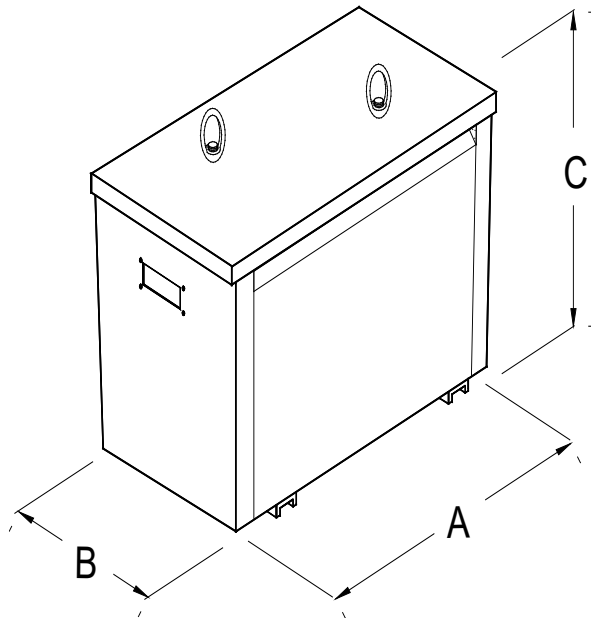

TGF

Standards	EN61558-2-1 EN61558-2-6 IEC726 CE
Primary voltage	Customer-specific
Secondary voltage	Customer-specific
Secondary voltage is calculated for 80% load	
Normal frequency	50-60 Hz
Maximum ambient temperature	30°C
Temperature class (temperature rise)	B (130°C)
Connection	Terminal block alt. cable lugs

Power kVA	Type Namn	Uk %	Po W	Pcu W	A mm	B mm	C mm	Flange opening fl	Weight kg
3	TGF-3	3,3	53	145	350	250	425	fl-13	38
3,5	TGF-3,5	3	66	150	350	250	425	fl-13	42
4	TGF-4	2,7	75	155	350	250	425	fl-13	47
4,5	TGF-4,5	2,5	88	160	350	250	425	fl-13	53
5	TGF-5	2,8	88	200	420	250	480	fl-13	57
6	TGF-6	2,8	88	243	420	250	480	fl-13	60
7,5	TGF-7,5	2,2	106	242	420	250	480	fl-13	73
8,5	TGF-8,5	2	128	245	420	250	480	fl-13	81
10	TGF-10	2,2	140	315	480	320	560	fl-13	90
12	TGF-12	1,8	166	320	480	320	560	fl-13	104
15	TGF-15	1,6	219	360	480	320	560	fl-13	137
17	TGF-17	1,4	228	350	480	320	560	fl-13	145
20	TGF-20	4,5	214	970	580	320	695	fl-21	168
25	TGF-25	4	244	1020	580	320	695	fl-21	182
30	TGF-30	3,5	300	1120	650	390	775	fl-21	222
40	TGF-40	3,3	365	1240	650	390	775	fl-21	275
50	TGF-50	2,8	230	1370	720	390	835	fl-21	270
60	TGF-60	2,8	260	1480	720	390	835	fl-21	300
70	TGF-70	2,5	287	1500	720	390	835	fl-21	360
80	TGF-80	3,1	285	1880	760	410	985	fl-21	410
100	TGF-100	3	330	1930	760	490	985	fl-21	465
125	TGF-125	2,6	391	2270	900	490	1135	fl-21	575
150	TGF-150	2,8	419	2400	900	490	1135	fl-21	650
200	TGF-200	3	350	3200	900	490	1135	fl-21	715

N.B. Dimensions and weights are preliminary and will be confirmed upon order

