


TRAMO

3-phase lying full transformer for installation in control cabinets unshielded design - IP00

All components are UL-approved.

Standards	EN61558-2-1 EN61558-2-6 IEC726 CE
Primary voltage	Customer-specific
Secondary voltage	Customer-specific
Normal frequency	50-60 Hz
Maximum ambient temperature	40°C
Temperature class (temperature rise)	B (130°C)
Connection	Terminal block alt. cable lugs or free outlet cables

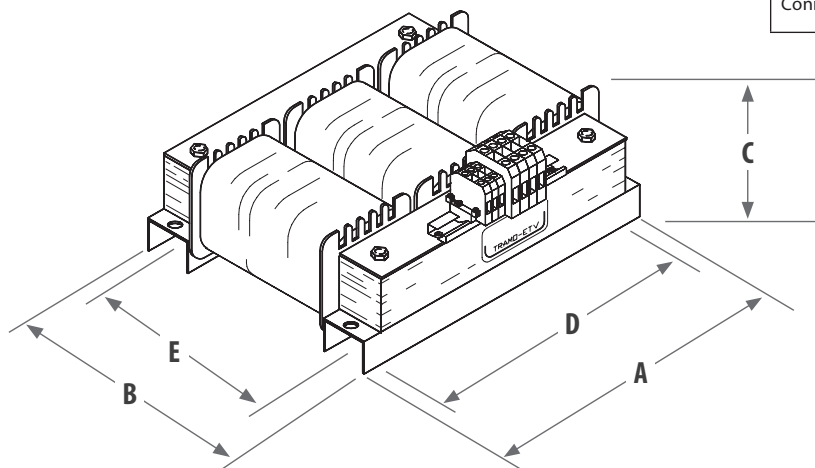

Power kVA	E-nr Art nr	U _k %	P _o W	P _{cu} W	A mm	B mm	C mm	D mm	E mm	Weight kg
0,1	TOFL-0100-x/y	12,8	5	19	120	127	63	80	119	1,9
0,15	TOFL-0150-x/y	10	7	22	120	127	73	80	119	2,6
0,25	TOFL-0250-x/y	8,8	9	31	150	160	70	100	150	3,7
0,4	TOFL-0400-x/y	6,7	13	41	150	160	85	100	150	5,5
0,5	TOFL-0500-x/y	6,9	12	51	177	187	80	120	176	6,3
0,63	TOFL-0630-x/y	6,1	16	58	177	187	90	120	176	8
0,8	TOFL-0800-x/y	5,8	19	68	208	215	90	140	203	10,5
1	TOFL-1000-x/y	5,2	28	75	208	215	110	140	203	13,5
1,2	TOFL-1200-x/y	4,5	28	78	208	215	110	140	203	14
1,4	TOFL-1400-x/y	4,6	27	94	240	245	95	160	232	15
1,7	TOFL-1700-x/y	3,9	33	98	240	245	105	160	232	18
2	TOFL-2000-x/y	3,7	40	107	240	245	115	160	232	21
2,5	TOFL-2500-x/y	3	49	110	240	245	129	160	232	25
3	TOFL-3000-x/y	3,3	52	145	300	285	140	270	210	30
3,5	TOFL-3500-x/y	3	65	150	300	285	153	270	210	38
4	TOFL-4000-x/y	2,7	75	155	300	285	165	270	210	43
4,5	TOFL-4500-x/y	2,5	88	160	300	285	190	270	210	50
5	TOFL-5000-x/y	2,8	88	200	360	335	160	325	250	52
6	TOFL-6000-x/y	2,8	88	243	360	335	160	325	250	56
7,5	TOFL-7500-x/y	2,2	106	242	360	335	176	325	250	62
8,5	TOFL-8500-x/y	2	128	245	420	370	180	325	250	74
10	TOFL-10000-x/y	2,2	140	315	420	370	190	375	295	88
12	TOFL-12000-x/y	1,8	166	320	420	370	205	375	295	100
15	TOFL-15000-x/y	1,6	219	360	420	370	250	375	295	130
17	TOFL-17000-x/y	1,4	228	350	420	370	250	375	295	133

N.B. Dimensions and weights are preliminary and will be confirmed upon order